


AIR-POWERED DIAPHRAGM PUMP

Main features:

- Diaphragm life up to 18million times.
- Patented commutator construction ,long time.
- 100% Transmission efficiency.
- Available for 4-6spray guns simultaneously.
- Especially suitable for conveyance fluid,paint spraying.

A-25

- Max working pressure : 7bar
- Operating pressure : 2-7bar
- Air consumption : 40m³/h
- Max flow rate : 60L/min
- Max suck height : 4.5m
- Inlet size : 3/4"
- Max solid Dia. : 2.5mm

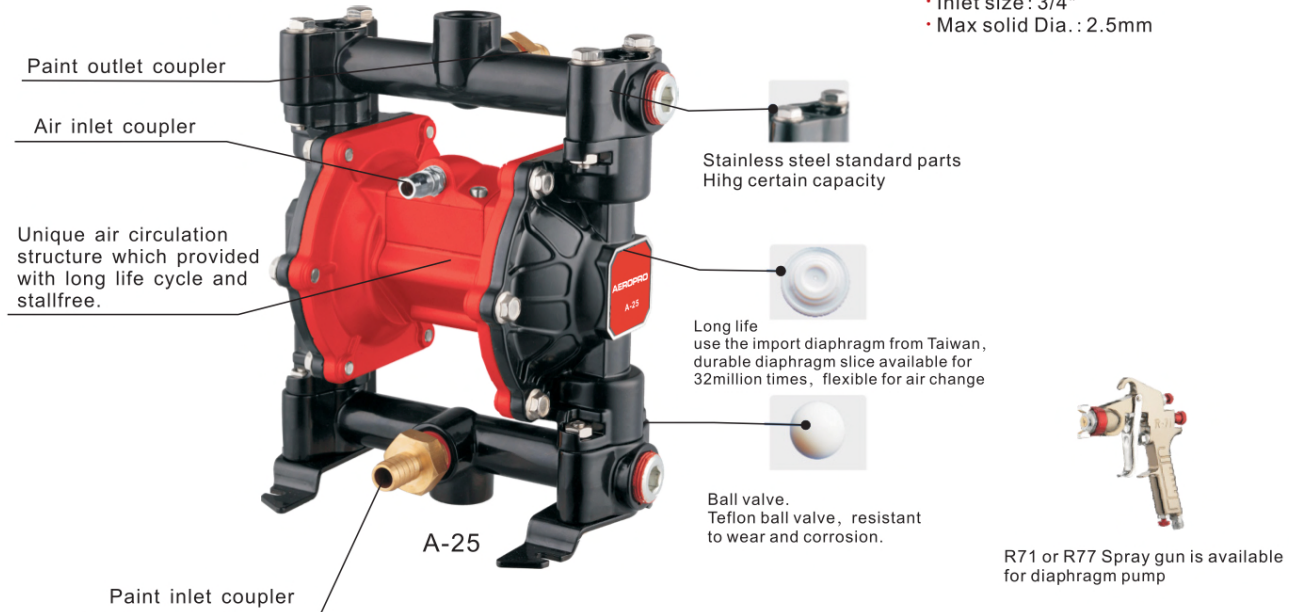

A-15

- Key application:widely used in paint spraying, chemical industry, industrial chemical, ceramics, biotechnology, medical, food industry.

Main date:

- Max working pressure: 7bar
- Operating pressure: 2-7bar
- Air consumption: 10m³/h
- Max flow rate: 18L/min
- Inlet size: 3/8"



FR-50

- Liquid Manostat
It suitable for all kinds
of diaphragm pump.
- Operating pressure: 7.0bar
- Pressurized strength: 15bar
- Max flow rate: 23L/min
- Chief membrane material:PTFE
- Paint inlet coupler:G3/8" Thread.

Application:

- Mainly provide stable pressure source for spray gun or paint equipment in the fluid tube,only available for diaphragm pump.